


FIRE HYDRANT ASSEMBLY AND MARKER

Not to Scale

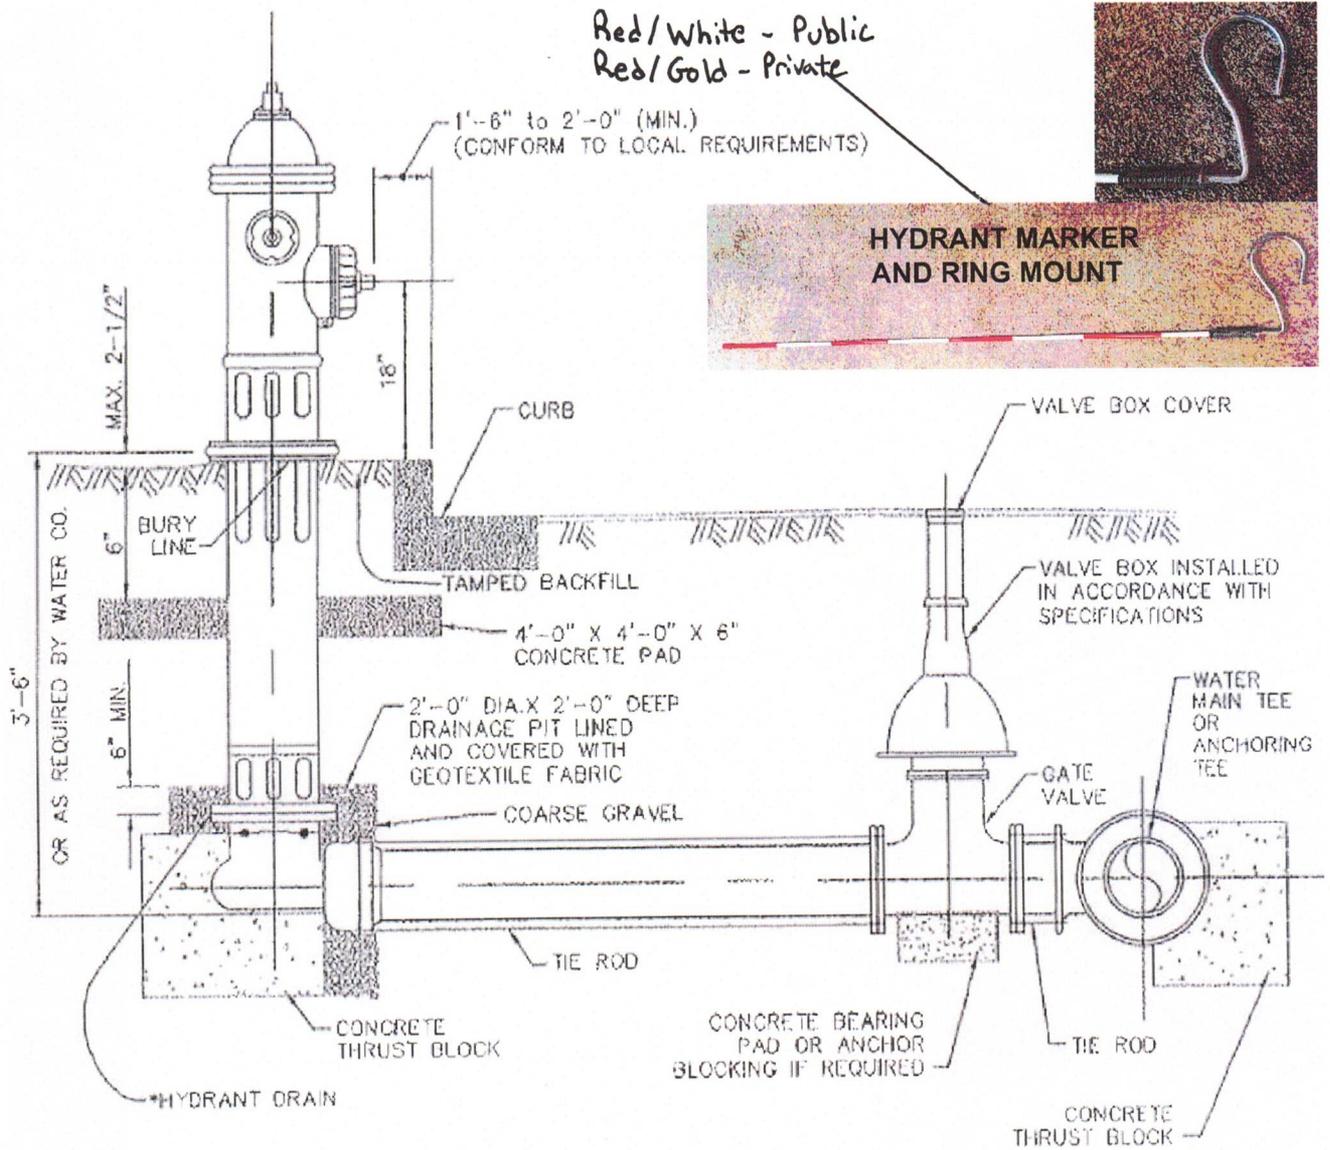

NOTES:

1. FOR INSTALLATION IN HIGH GROUND WATER TABLES. ENGINEER MAY DELETE DRAINAGE PIT AND REQUIRE THE HYDRANT DRAIN TO BE PLUGGED.
2. FIRE HYDRANT ASSEMBLY TO MEET CURRENT PENNSYLVANIA-AMERICAN WATER COMPANY STANDARD.
3. ALL HYDRANTS SHALL STAND PLUMB AND SHALL HAVE THE PUMPER NOZZLE FACING THE CURB.
4. THE MAIN HYDRANT DISCHARGE MUST BE A 5" STORZ FITTING PER THE TOWNSHIP FIRE DEPARTMENT REQUIREMENT.
5. THE TWO (2) 2.5" HYDRANT DISCHARGES MUST BE 3.0625 X 6 THREADS PER INCH OR "PITTSBURGH 6 THREAD". THIS IS THE HOSE THREAD FOR THE TOWNSHIP'S FIRE COMPANIES 2.5" HOSE.
6. A FIRE HYDRANT MARKER MUST BE INSTALLED WITH EACH HYDRANT. A 4' LONG BY 3/8" FIBERGLASS SHAFT WITH REFLECTIVE RED/WHITE 6" STRIPING. THE MARKER MUST HAVE A SOLID STAINLESS "OFFSET" RING MOUNT AND A SOLID STAINLESS SPRING WITH ALUMINUM THREADED INSERT. MANUFACTURER HY-VIZ, INC. OR APPROVED EQUAL.

REVISIONS:
ADOPTED 2-4-2019

FIRE HYDRANT STANDARD

CECIL TOWNSHIP
WASHINGTON COUNTY, PA

C-109
SHEET 1 OF 1